



US 20170126163A1

(19) **United States**(12) **Patent Application Publication**  
**LIANG**(10) **Pub. No.: US 2017/0126163 A1**(43) **Pub. Date: May 4, 2017**(54) **VARIABLE FREQUENCY DRIVE SYSTEM***H02P 27/06* (2006.01)*H02P 6/00* (2006.01)*H02P 6/10* (2006.01)(71) Applicant: **Hyperloop Technologies, Inc.**, Los Angeles, CA (US)(52) **U.S. Cl.**CPC ..... *H02P 25/06* (2013.01); *H02P 6/006*(2013.01); *H02P 6/10* (2013.01); *H02P 27/06*(2013.01); *H02J 7/02* (2013.01); *H02J 7/345*

(2013.01)

(72) Inventor: **Jiaqi LIANG**, Pasadena, CA (US)(73) Assignee: **Hyperloop Technologies, Inc.**, Los Angeles, CA (US)(21) Appl. No.: **15/338,102**


(57)


**ABSTRACT**(22) Filed: **Oct. 28, 2016****Related U.S. Application Data**

(60) Provisional application No. 62/247,954, filed on Oct. 29, 2015.


**Publication Classification**(51) **Int. Cl.***H02P 25/06* (2006.01)*H02J 7/02* (2006.01)

A dynamic linear motor is controlled by determining a relative proximity of a moving rotor of the linear motor to a fixed stator segment of the linear motor using a current location of the moving rotor. A current driving characteristic of the linear motor at the current location of the moving rotor is determined. Settings for the fixed stator segment when the moving rotor reaches the fixed stator segment are identified based on the current driving characteristic. The fixed stator segment is driven based on the settings when the moving rotor reaches the fixed stator segment.

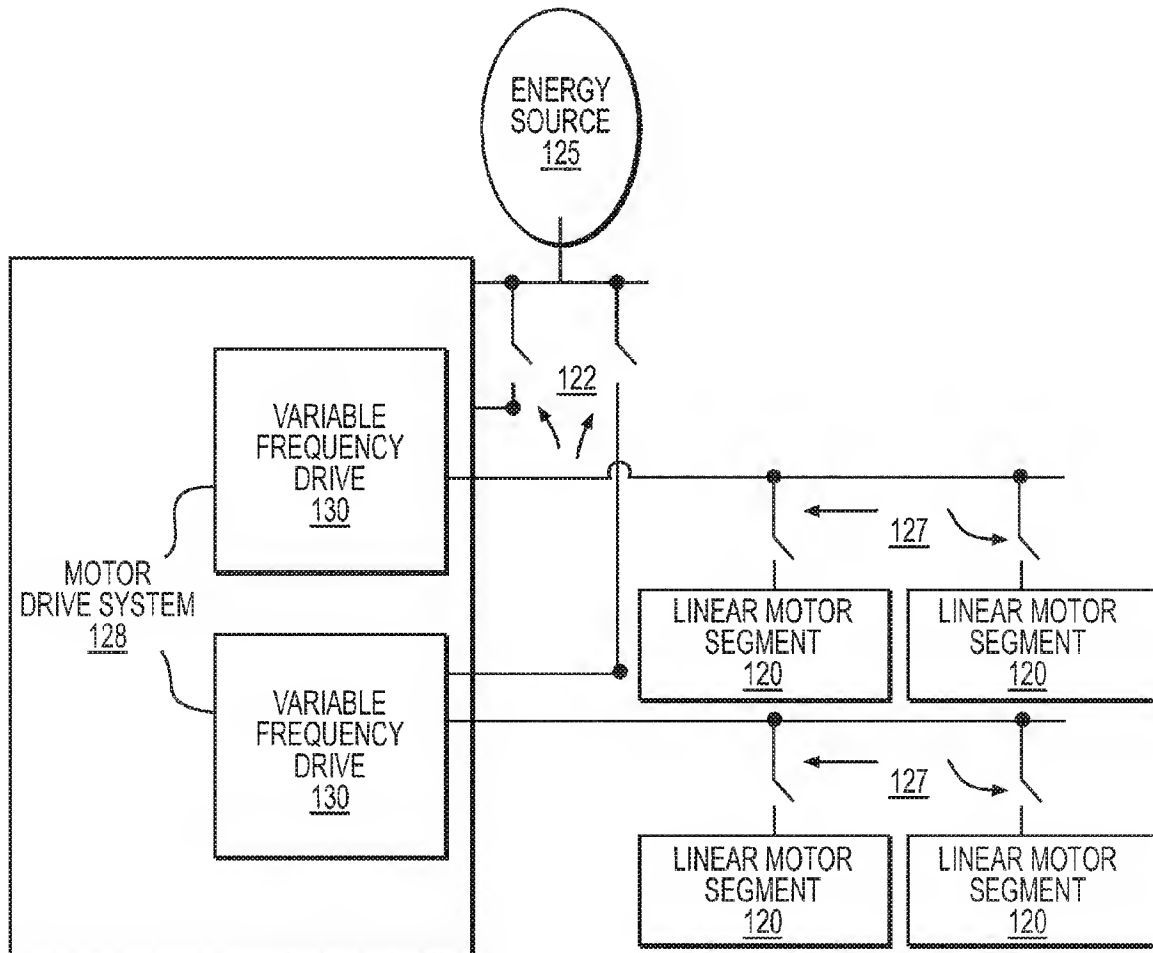


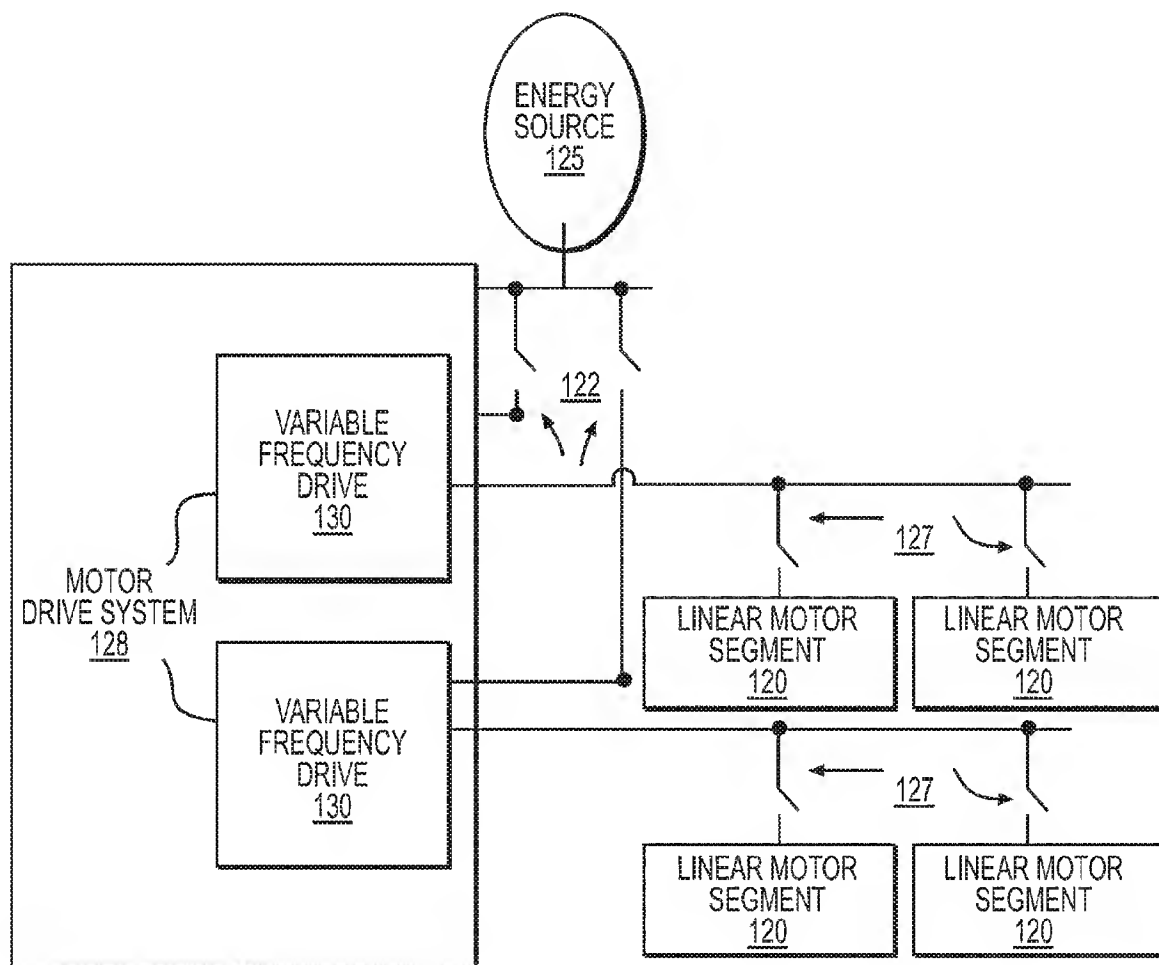


**FIG. 1**

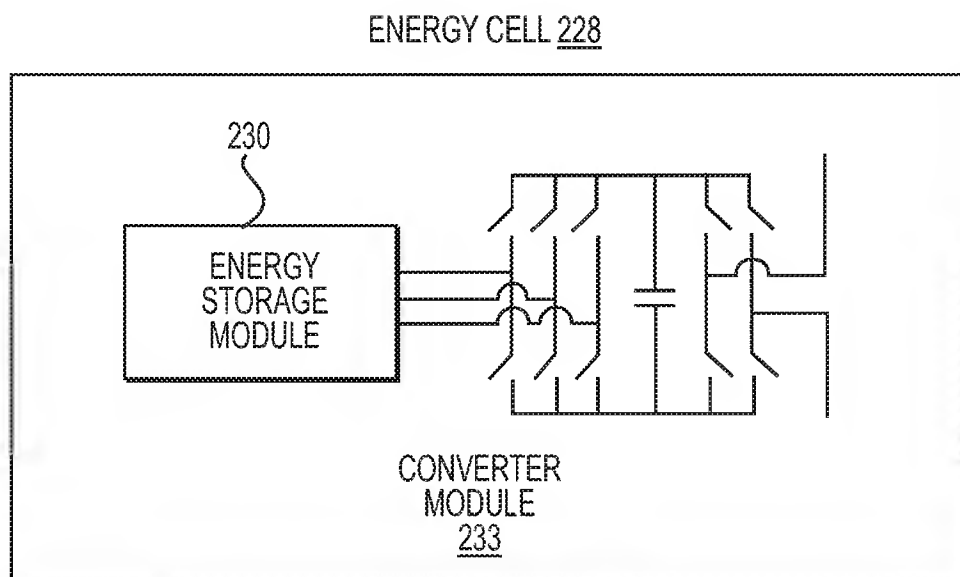


**FIG. 2**

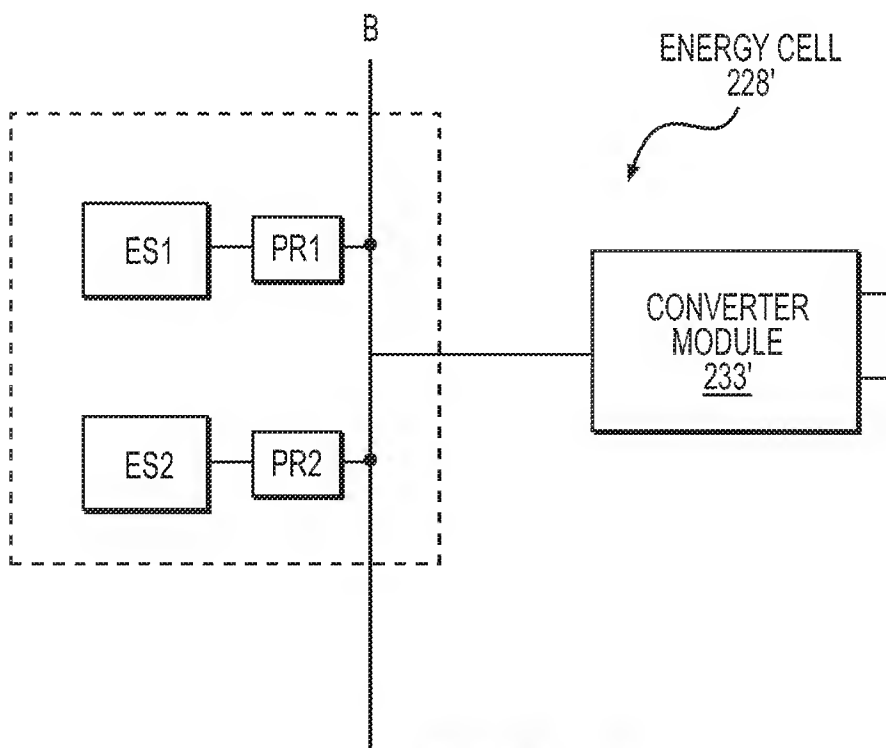


**FIG. 3**

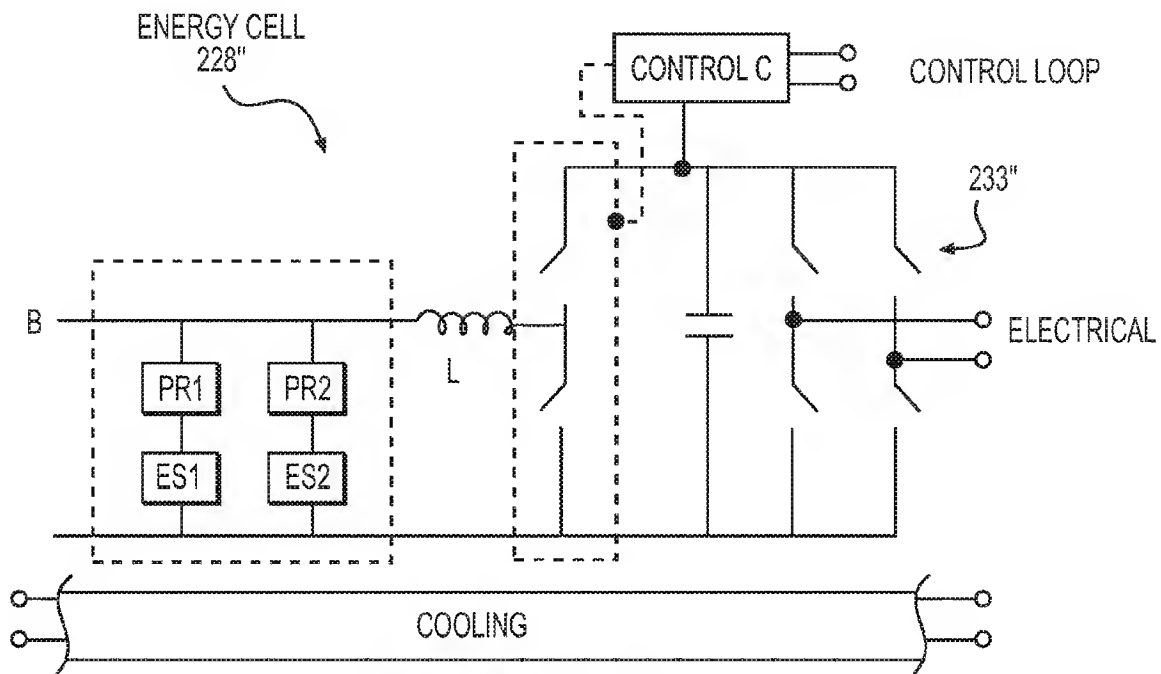


**FIG. 4**

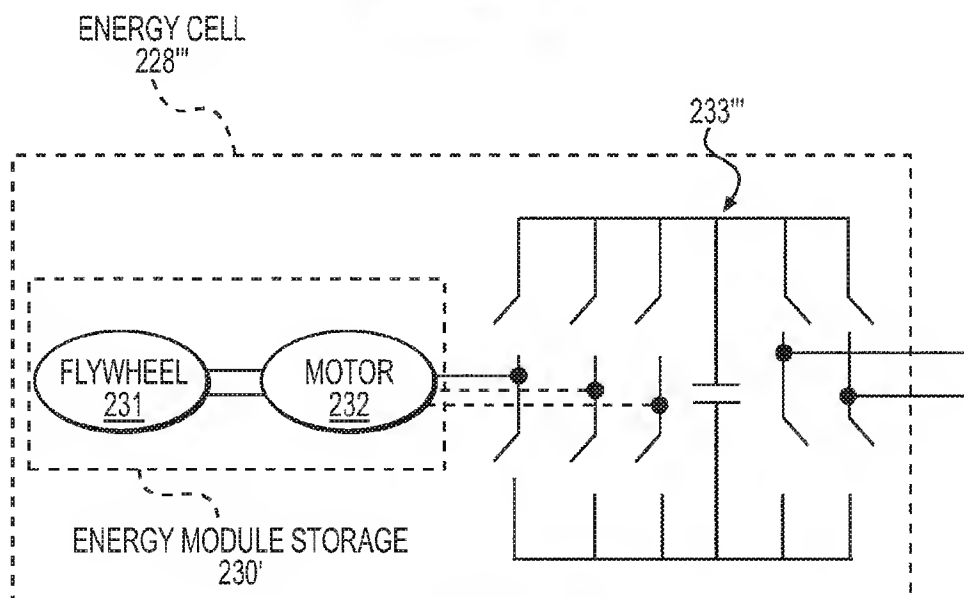

**FIG. 5**

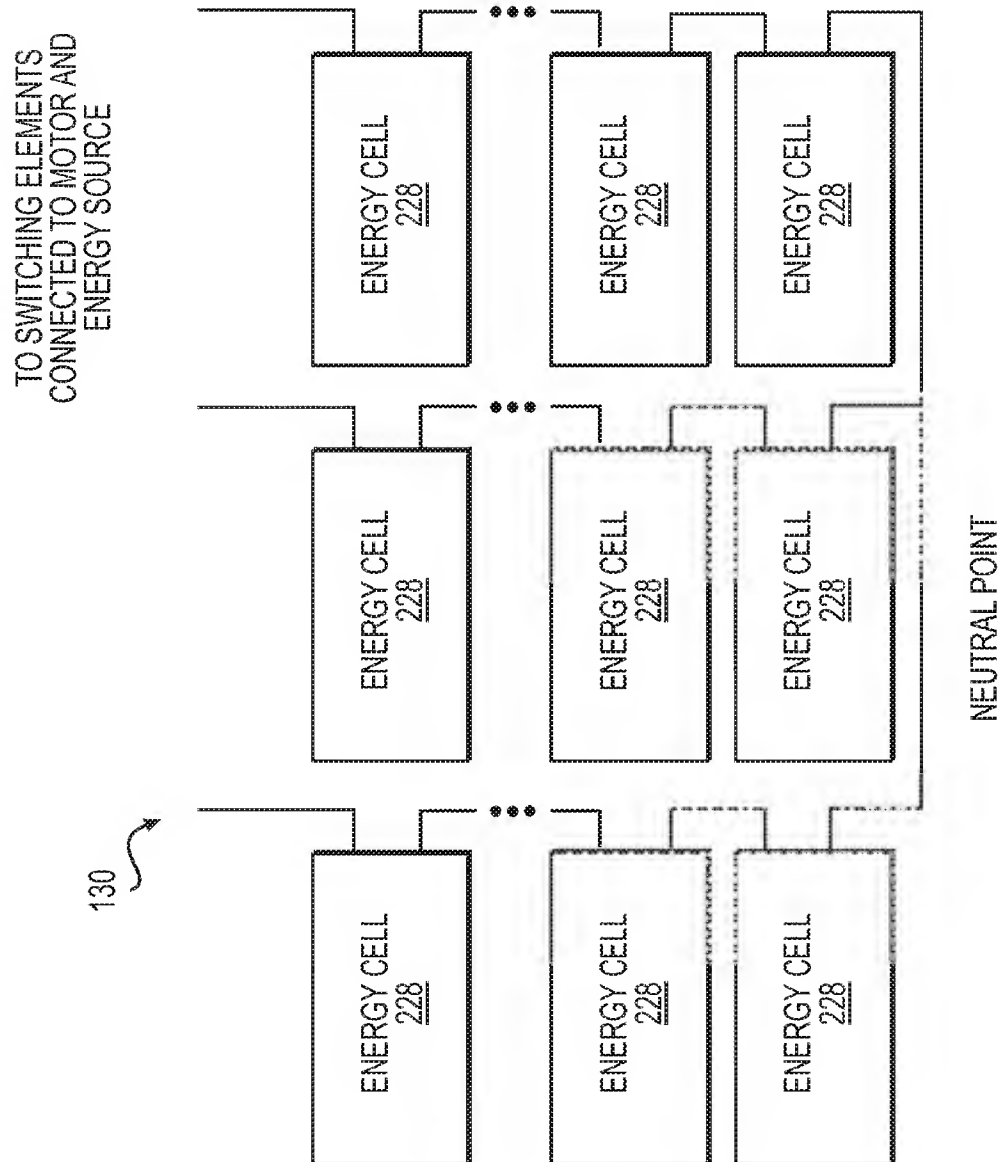

**FIG. 6**

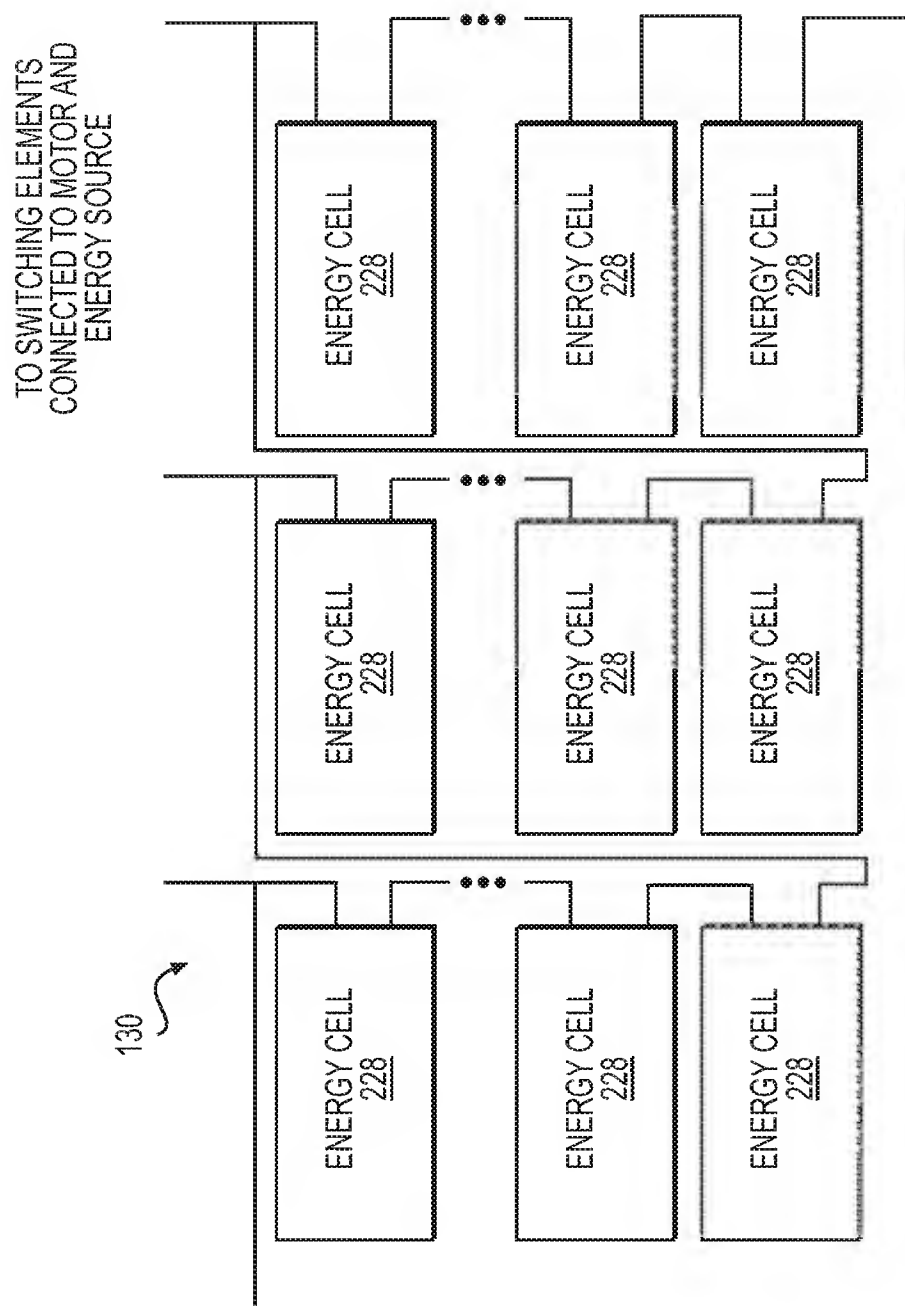

**FIG. 7**

**FIG. 8**

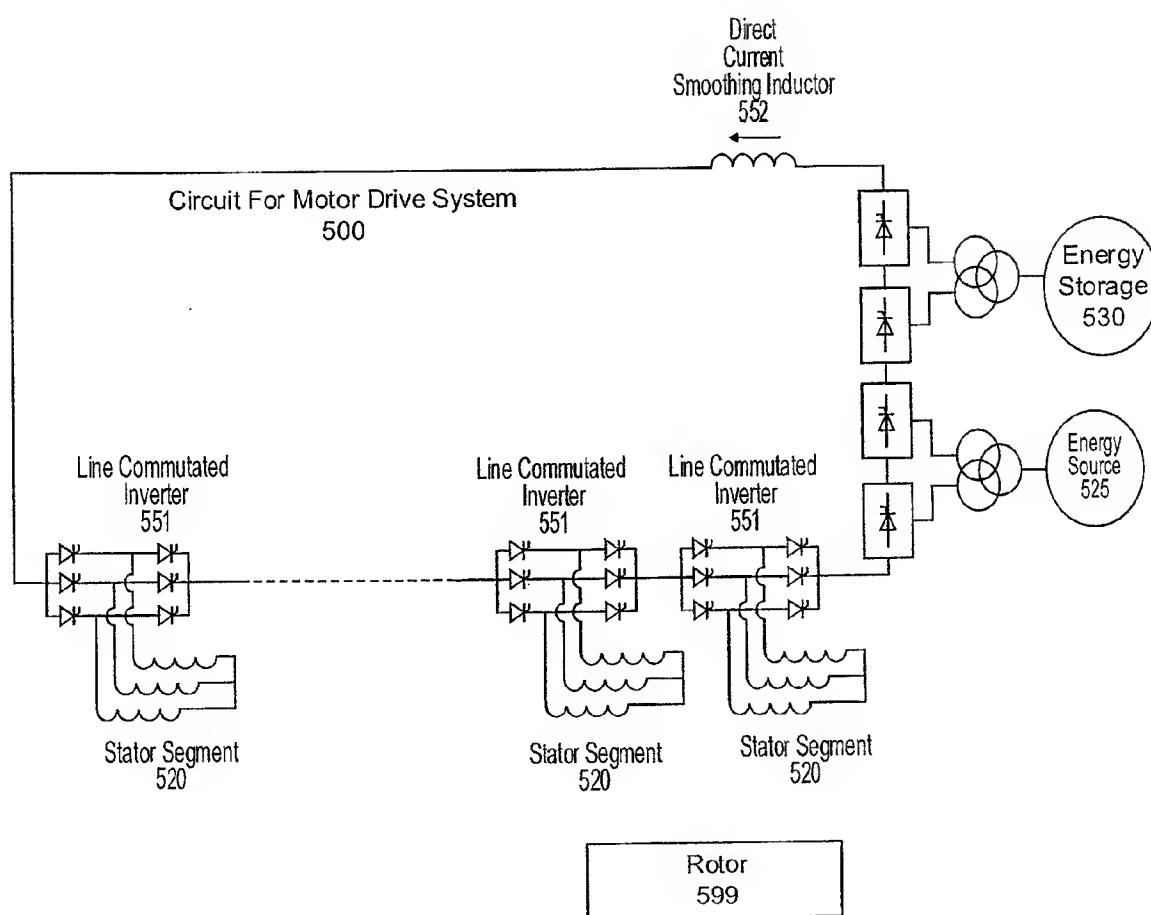


FIG. 9

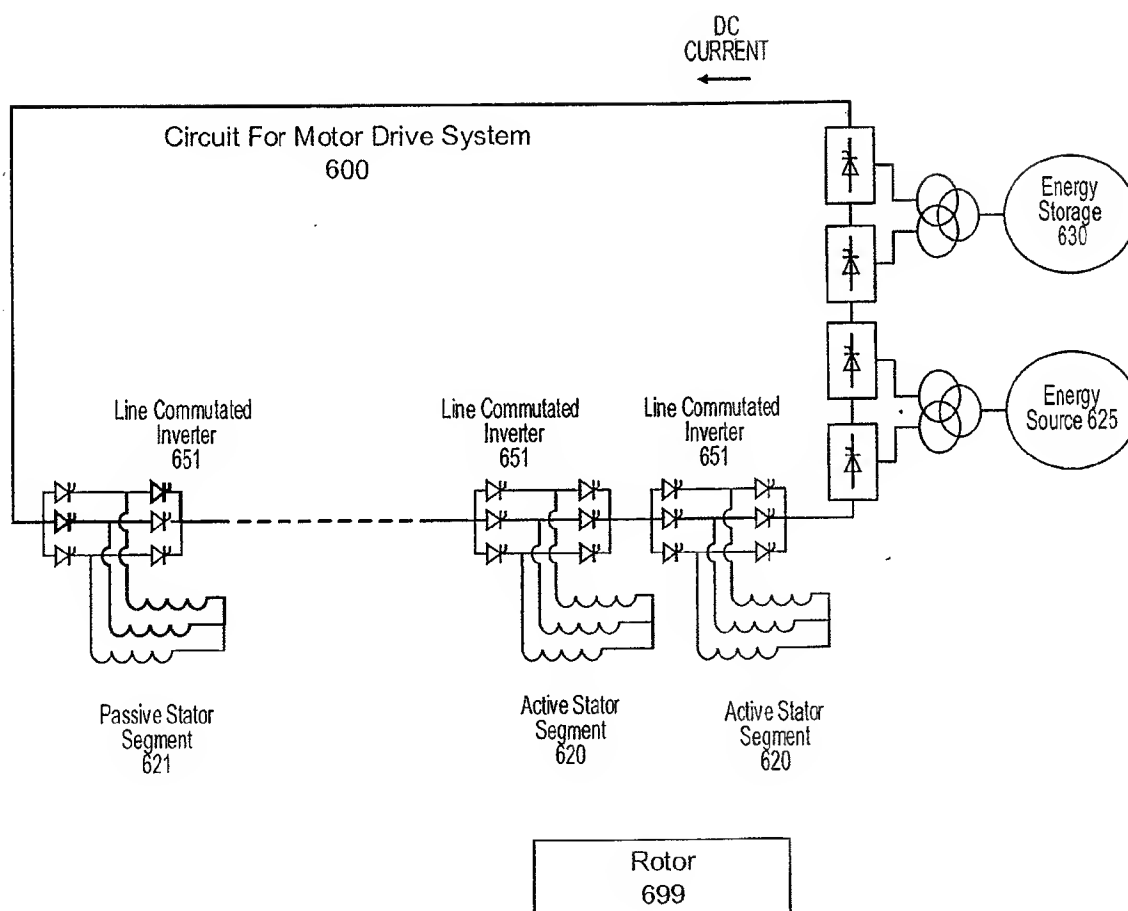




Figure 10a

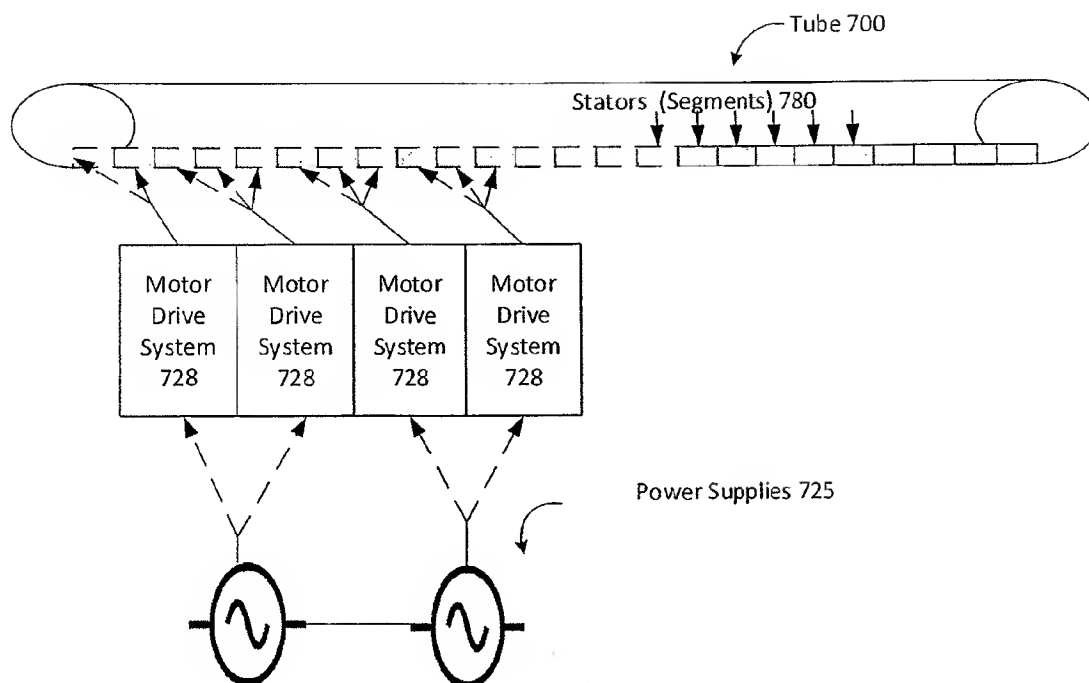


Figure 10b


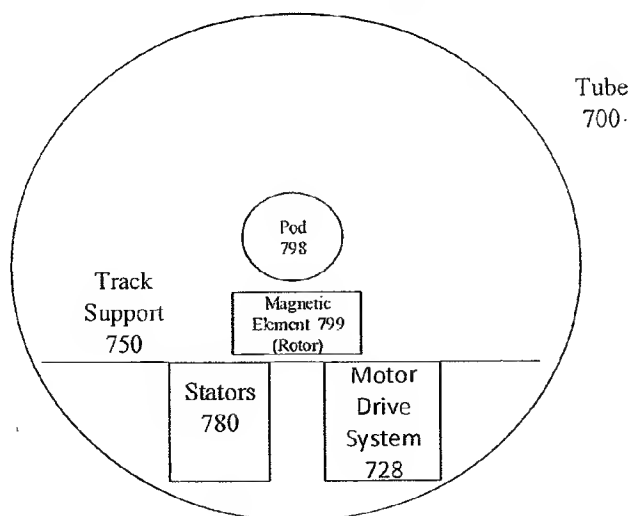


Figure 11





**FIG. 12**

Figure 13

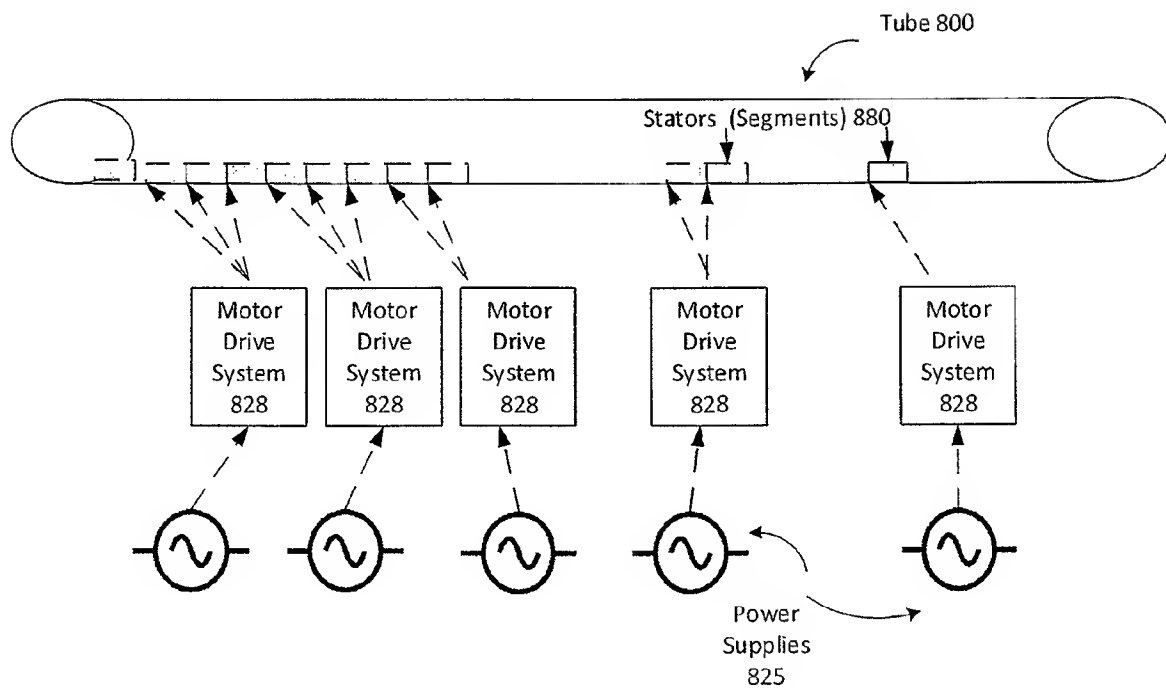

## VARIABLE FREQUENCY DRIVE SYSTEM

### CROSS REFERENCE TO RELATED APPLICATION

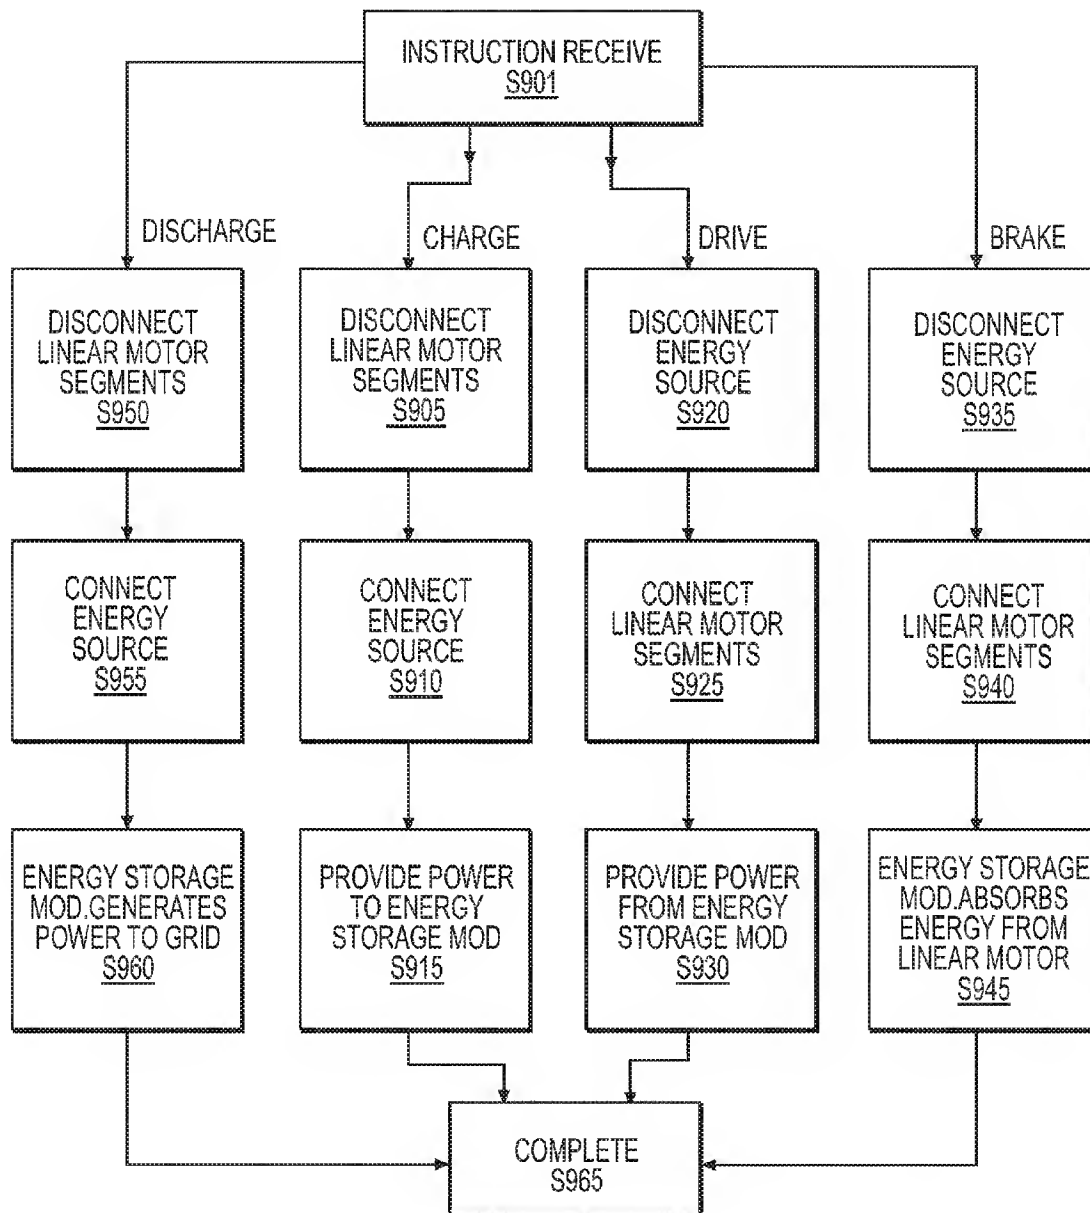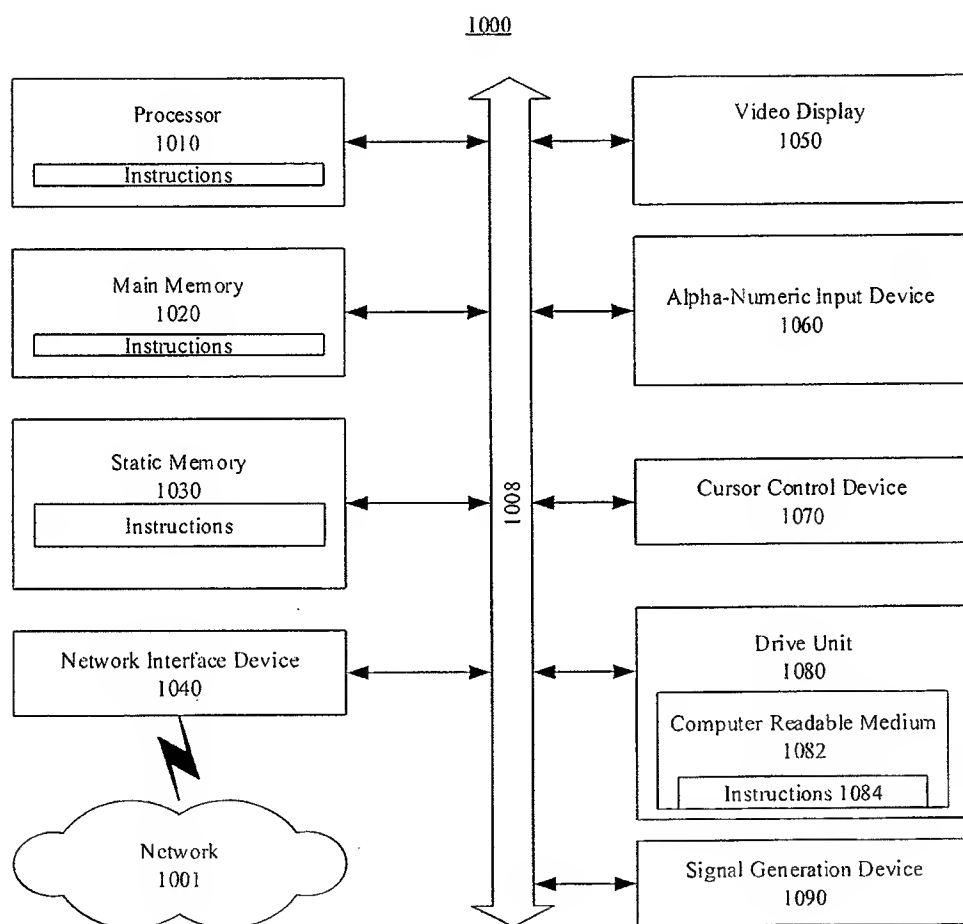[0001] The present application claims the benefit of U.S. Provisional Patent Application No. 62/247,954, filed on Oct. 29, 2015, the disclosure of which is expressly incorporated by reference herein in its entirety.

### BACKGROUND

[0002] 1. Field of the Disclosure

[0003] The present disclosure relates to the field of energy supply systems. More particularly, the present disclosure relates to energy supply for motor drive systems.

[0004] 2. Background Information

[0005] A linear motor is an electric motor that has had its stator and rotor “unrolled” so that instead of producing torque, it produces a linear force along its length. This can be useful for a variety of purposes including for powering a transportation system.

[0006] Separately, energy supplied from the power grid has traditionally been provided via isolation transformers to a variable frequency converter. The converter converts voltage and current from the power grid’s parameters to the destination’s parameters, and also provides the necessary function of isolating the destination from the power grid. Additionally, a separate energy storage system is required when using a cascaded H-bridge converter. Configurations of cascaded H-bridge converters with an integrated energy storage (e.g., battery) connected to each converter can be prohibitively expensive, and are not particularly reliable when used in pulse power applications and/or a harsh environment.

[0007] A transportation system can operate by providing external power (e.g., from energy storage systems or the power grid) to vehicles using a linear motor to propel vehicles along tracks. For a transportation system such as a commuter rail system, external power can be supplied to the entire transportation system continuously.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The novel features which are characteristic of the present systems, both as to structure and method of operation thereof, together with further aims and advantages thereof, will be understood from the following description, considered in connection with the accompanying drawings, in which embodiments of the system are illustrated by way of example. It is to be expressly understood, however, that the drawings are for the purpose of illustration and description only, and they are not intended as a definition of the limits of the system. For a more complete understanding of the disclosure, as well as other aims and further features thereof, reference may be had to the following detailed description of the disclosure in conjunction with the following exemplary and non-limiting drawings wherein:

[0009] FIG. 1 is a diagram of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0010] FIG. 2 is a diagram of an embodiment of an energy cell of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0011] FIG. 3 is a diagram of another embodiment of an energy cell of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0012] FIG. 4 is a diagram of another embodiment of an energy cell of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0013] FIG. 5 is a diagram of still another embodiment of an energy cell of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0014] FIG. 6 is a diagram of a Wye configuration for an energy cell of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0015] FIG. 7 is a diagram of a Delta configuration for an energy cell of a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0016] FIG. 8 is a diagram of a system that includes a circuit for a variable frequency drive system, according to an aspect of the present disclosure;

[0017] FIG. 9 is a diagram of a system that includes a circuit for a variable frequency drive system, according to an aspect of the present disclosure;

[0018] FIG. 10a is a view of a transportation system that includes a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0019] FIG. 10b is a frontal schematic view of a transportation system that includes a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0020] FIG. 11 is a view of another transportation system that includes a motor drive system for a linear motor, according to an aspect of the present disclosure;

[0021] FIG. 12 is a flow chart for charging and discharging energy to and from a variable frequency drive system, according to an aspect of the present disclosure; and

[0022] FIG. 13 is an exemplary general computer system that includes a set of instructions for a variable frequency drive system, according to an aspect of the present disclosure.

### DETAILED DESCRIPTION

[0023] In view of the foregoing, the present disclosure, through one or more of its various aspects, embodiments and/or specific features or sub-components, is thus intended to bring out one or more of the advantages as specifically noted below.

[0024] Methods described herein are illustrative examples, and as such are not intended to require or imply that any particular process of any embodiment be performed in the order presented. Words such as “thereafter,” “then,” “next,” etc. are not intended to limit the order of the processes, and these words are instead used to guide the reader through the description of the methods. Further, any reference to claim elements in the singular, for example, using the articles “a,” “an” or “the”, is not to be construed as limiting the element to the singular.

[0025] A high-speed transportation system can use a low pressure environment in a tube in order to reduce drag on a vehicle at high operating speeds. The transportation system could benefit from both a greater speed potential and lowered energy costs, both resulting from reducing drag. Such a system could use a near vacuum within a tubular structure. The inventors of the technology and inventions described herein are involved in building and fully implementing such a transportation system.

[0026] A variable frequency drive system for a motor drive system is described herein, and can be used to implement a high-speed transportation system. The disclosure herein also provides for a converter system that drives a linear motor and interfaces with a hybrid energy supply system and/or energy source (including the power grid). The variable frequency drive system and converter system may be provided as separate systems, or may be integrated together as a single system.

[0027] FIG. 1 is a diagram of a motor drive system for a linear motor, according to an aspect of the present disclosure. In FIG. 1, a medium-voltage (defined hereinafter) motor drive system 128 is provided as a system via variable frequency drives 130. Each variable frequency drive 130 is comprised of one or more energy cells (not shown in FIG. 1). An ultracapacitor is an example of an energy storage module contemplated by the described embodiments, as is a flywheel, batteries and/or other forms of energy storage devices, and these modules/devices can be provided as part of variable frequency drive 130 in motor drive system 128.

[0028] Each variable frequency drive 130 is connected to and disconnected from an external energy source 125 via at least one first switching element (switch) 122 and is also connected to and disconnected from linear motor segments 120 via at least one second switching element (switch) 127. In FIG. 1, multiple variable frequency drives 130 are shown. As can be easily envisioned, for a transportation system spanning dozens or hundreds of miles, numerous such variable frequency drives 130 can be used to form a motor drive system 128. Additionally, while only a single energy source 125 is shown in FIG. 1, variable frequency drives 130 may be connected to any number and different types of energy sources 125 such as, e.g., the power grid, renewable sources, combustion engines, additional energy storage, and so on.

[0029] External energy source 125 may be different power and voltage than the desired output for motor drives with energy storage 130. Voltage provided from the energy source 125 to the variable frequency drives 130 is drawn through the respective first switching elements 122. The converter module 233

[0030] The peak power resulting from an energy source 125 through the first switching elements 122 to the motor drives with energy storage 130 described herein is lower than in a conventional system because the energy can be drawn steadily from the source. Accordingly, the cost of using an array of first switching elements 122 is lower than conventional alternatives.

[0031] To charge variable frequency drive 130, e.g., one or more ultracapacitors or flywheels (or other energy storage devices), subsets of ultracapacitors or flywheels, or all ultracapacitors or flywheels, embedded in a motor drive system 128 formed by the variable frequency drives 130, a motor drive system 128 is first disconnected from all the linear motor segments 120 via the second switching elements 127, and then connected to the energy source 125 via the first switching elements 122. In embodiments, it is also contemplated that the above-noted variable frequency drives 130 can be discharged through first switching elements 122 to generate power to external energy source 125. To drive or brake a linear motor formed by the linear motor segments 120, the variable frequency drives 130 are first disconnected from the energy source 125, and then connected to the linear motor segments 120 via the second switching elements 127.

The energy stored in the ultracapacitor(s), flywheels or other energy storage devices of the variable frequency drives 130 is used to drive or brake the linear motor formed by the linear motor segments 120. Power provided to and drawn from the energy storage devices of variable frequency drives 130 is provided and drawn via converter module 233. In an alternative, it is also contemplated that power from external energy source 125 can be continuously flowing to variable frequency drives 130, whereby the energy cell 228 isolate external energy source 125 from linear motor segments 120 via the converter module 233 so that the need for first switches 122 to operate to charge/discharge the energy storage devices can be eliminated.

[0032] The linear motor segments 120 are discussed below, but as a contextual introduction, the linear motor segments 120 are stator segments of the linear motor. The rotor of the linear motor may be carried by a vehicle (pod or capsule) that travels through a tube in which the linear motor/linear motor segments are arranged. The linear motor segments 120 can be individually dynamically powered in synchronization with the approaching and departing vehicle (pod). The synchronization can be performed by using a computer as shown in FIG. 10, or using sensors distributed along a tube such as tube 700 in FIG. 7a. Such sensors can include position/motion sensors and velocity sensors. Although multiple variable frequency drives 130 are combined to form a motor drive system 128, they are not necessarily connected, electrically or mechanically. Each variable frequency drive 130 may be connected to and power, simultaneously or individually via switches, multiple linear motor segments 120. For instance, a first variable frequency drive 130 may activate a first linear motor segment 120 as a rotor interacts with the linear motor segment 120. A variable frequency drive 130 may activate a second linear motor segment 120 as the rotor moves from the first linear motor segment to the second linear motor segment. This may occur without any communication, electrical or mechanical, between the first and second variable frequency drives and without any communication, electrical or mechanical, between the first and second linear motor segment.

[0033] FIG. 2 is a diagram of an energy cell 228 for a variable frequency drive 130, according to an aspect of the present disclosure. In FIG. 2, the energy cell 228 includes a converter module 233 and an energy storage module 230. The energy storage module 230 can include, e.g., at least one ultracapacitor, at least one flywheel with an associated motor and/or other energy storage device(s), which can be connected to a converter module 233 to convert relatively low-voltage power supplied by energy storage module 230, approximately 1.2 kV, to a relatively higher (as compared to the low-voltage power) medium-voltage, approximately 13.8 kV, that can be applied to a linear motor, e.g., linear motor segments 120 (see FIG. 1). Thus, the converter module 233 provides power of sufficient voltage to drive linear motor segments 120. The converter module 233 may also function to reduce the voltage coming from energy source 125, which could be in excess of 100 kV, such as through pulse conversion. It may also switch the electrical polarity of the circuit. It may also smooth the output voltage by drawing from or to an integrated capacitor if the incoming voltage is not steady. The converter may also function to short the circuit as an emergency cut off. In the illustrated embodiment, energy storage module 230 can output single

phase (solid line) or multiphase voltage power (solid and dashed lines) to respective switches of voltage converter module 233 to convert the single phase or multiphase low voltage power to the desired medium voltage power.

**[0034]** In a further embodiment of motor drive component of an energy cell 228' illustrated in FIG. 3, more than one energy storage module ES1, ES2 can be connected in parallel to a common bus B via protective devices PR1, PR2, respectively, which can be switches or fuses. Bus B can be connected to converter module 233' in such a manner that one or more phases from energy storage modules ES1, ES2 are converted from a single phase to multiphase low-voltage power to a medium-voltage for connection to the linear motor segments 120.

**[0035]** In still another embodiment of an energy cell 228" illustrated in FIG. 4, more than one energy storage module ES1, ES2 can be arranged in parallel to connect to a common bus B through respective protective devices PR1, PR2. An inductor L can be connected between bus B to combine multiple phases of the parallel energy storage devices ES1, ES2 into one terminal of converter module 233", thus eliminating the need for separate switches for each phase. FIG. 4 further shows a control device C connected to converter module 233" to control the operation of the switches that inputs the low voltage power into the converter module 233". Further control device C can be connected, e.g., via optical fiber to a central control unit (not shown) that monitors and controls all control devices C connected as part of a control loop of the system. FIG. 4 also schematically illustrates a cooling device, which can run along the entire system or along discrete portions of the system, i.e., where needed, to prevent overheating of the components.

**[0036]** In an alternative embodiment of an energy cell 228' illustrated in Figure, when energy storage module 230' includes a flywheel 231, an associated motor 232 for charging the flywheel can be connected between the flywheel and converter module 233', as shown in FIG. 5, so that the three phases of the associated motor 232 of flywheel 231 are connected to converter module 233. The three-phase converter module 233 converts the three-phase low-voltage power from the flywheel energy storage module to the desired medium-voltage to be applied to linear motor segments 120.

**[0037]** In embodiments, energy cell 228 may be a variable frequency drives 130 so that multiple low-voltage energy cells 228 may be combined together to form the desired medium-voltage motor drive to supply the desired medium voltage power to linear motor segments 120. Using the converter module 233, low-voltage stored in the ultracapacitor 231 can be converted to a higher voltage used to drive the linear motor as described herein.

**[0038]** Additionally, the acts of storing energy in energy storage module 230 (ES1, ES2) and providing energy from energy storage module 230 (ES1, ES2) may be synchronized by a coordinating computer (see FIG. 13) and/or sensors distributed along a tube (see FIG. 10a). In this way, numerous motor drive systems 228 may be used to coordinate power supply to multiple different linear motor segments 120. One example of such coordination is disclosed in commonly-assigned U.S. patent application Ser. No. 15/008,024, filed on Jan. 27, 2016 and entitled "Dynamic Linear Stator Segment Control", the entire contents of which are expressly incorporated by reference herein in their entireties.

**[0039]** FIG. 6 is a diagram of a Wye configuration for energy cells 228 to form a variable frequency drive 130, according to an aspect of the present disclosure. In a symmetric three-phase power supply system, alternating current (AC) of the same frequency and voltage amplitude is carried by three conductors, each with a phase difference of one third. The voltage on any conductor reaches a peak at one third of a cycle after one of the other conductors and one third of a cycle before the remaining conductor, due to the phase difference. This phase delay gives constant power transfer to a balanced linear load, and allows production of a rotating magnetic field in an electric motor. Three-phase electric power is commonly used for alternating-current power transfer, including for large motors such as would be used with a large transportation system.

**[0040]** In the embodiment of FIG. 6, nine energy cells 228, each comprising an energy storage (ES) module 230 and a converter module 233, are arrayed in a Wye configuration in groups of three. The energy cells 228 in each group are arranged in series so that a line out from each group leads to switching elements connected to a linear motor and/or energy source. In the Wye configuration, each group is also connected by a transformer to a common neutral point.

**[0041]** FIG. 7 is a diagram of a Delta configuration for energy cells 228 of a variable frequency drive 130, according to an aspect of the present disclosure. In the Delta configuration, nine energy cells 228, each comprising an energy storage (ES) module 230 and a converter module 233, are again arranged in groups of three, but in FIG. 7 each line out to switching elements connected to linear motor and/or energy source leads out from two of the three groups.

**[0042]** FIGS. 8 and 9 are diagrams of circuits for a motor drive system for a linear motor, according to an aspect of the present disclosure. In FIG. 5, multiple line commutated inverters (LCIS) 551 are distributed along linear motor stator segments 520. In FIG. 6, multiple line commutated inverters 651 are similarly distributed along linear motor stator segments. The line commutated inverters 551 and 651 are not all identical, as 3-phase line commutated inverters 551, 651 are connected to stator segments 520, 620, while 1-phase line commutated inverters 551, 651 are connected to energy storage module 530, 630 and/or energy sources 525, 625. Line commutated inverters are circuit elements that translate direct current in a circuit path into alternating current that can be provided to additional elements. In FIGS. 5 and 6, the additional elements include energy storage module 530, 630, energy sources 525, 625, stator segments 520, 620, and so on. As an analogy, if the circuits 500 and 600 are considered analogous to highways along which direct current travels, the line commutated inverters 551, 651 could be considered analogous to entrances and exits by which energy can enter and exit the circuits.

**[0043]** The alternating current (AC) sides of three line commutated inverter 551 in FIG. 5 connect to a linear motor stator segment 520. The direct current (DC) sides of all line commutated inverters 551 in the circuit 500 are connected in series. The line commutated inverters 551 in FIG. 5 include the three at the bottom connected to stator segments 520, and also additional line commutated inverters that connect to an energy storage module 530 (for example, ultracapacitor, flywheel, etc.), and an energy source 525 (for example, the grid, renewable generation, a combustion engine generator).

**[0044]** Additionally, a smoothing inductor 552 can be used to smooth the direct current in the circuit 500. Direct current

in the direct current smoothing inductor **552** is built up by converting energy that enters the circuit **500** from the energy source **525** and/or from the energy storage **530** via the respective line commutated inverters **551**. The direct current can also be used to charge or discharge the energy storage module **530** via the corresponding line commutated inverter **551**.

[0045] In FIG. 8 and FIG. 9, as a rotor **599** or **699** travels, nearby or approaching linear motor stator segments **520** or **620** are activated, and other linear motor stator segments **520** or **620** (e.g., remote from the rotor location) may remain passive (i.e., deactivated). The line commutated inverters **551** or **651** that are connected to the active stator segments **520** or **620** commutate the direct current from the circuit **500**, **600** sequentially into each phase of the coils of the active stator segments **520** or **620**. In this way, a moving flux is formed. The moving flux drives the rotor **599** or **699**. The line commutated inverters **551**, **651** that are connected to the passive stator segments **520** or **620** are controlled to bypass the DC current by turning on thyristors in one or more phases.

[0046] The embodiments of FIGS. 8 and 9 can provide power at lower cost than conventional voltage source converters for several reasons, including cheaper component manufacturing costs. This also reduces cabling necessary along the linear motor stator segments **520**, **620**. Only direct current cables of two polarities may be required, compared to a multitude of 3-phase alternating current cables that would be required in an alternative using a central converter with segment switches instead of the direct current cables and line commutated inverters **551**, **651**.

[0047] In an embodiment, a direct current inductor can be implemented using the coils of the passive stator segments **620** which are not being actively driven. In this way, instead of bypassing the line commutated inverters **651** for the passive stator segments **620**, selected thyristors can be turned on so that the coils of the passive stator segments **620** are connected in the direct current loop of the circuit **600**. The coils of the passive stator segments **620** then provide direct current inductance for the active line commutated inverters **551**.

[0048] In another embodiment, distributed line commutated inverters **551**, **651** may be connected to multi-phase linear motors so as to reduce torque ripples. Each distributed line commutated inverter **551**, **651** has multiple phase legs as shown, and adjacent line commutated inverters **551**, **651** can be operated with phase shifts.

[0049] In FIG. 9, two of three stator segments **620** are labeled active, and one stator segment **621** is labeled passive. This shows how specific stator segments **620** can be selectively driven as a rotor **699** approaches, while other stator segments **620** remain passive.

[0050] FIG. 10a is a view of a transportation system that includes a motor drive system for a linear motor, according to an aspect of the present disclosure, and FIG. 10b is a frontal schematic view of the transportation system for a hybrid energy supply system, according to an aspect of the present disclosure. Tube **700** can be, e.g., a subway tunnel, or a tube within which transportation pods can travel. As such, the tube **700** may be dozens or even hundreds of kilometers long, and on the order of 25-250 feet in diameter. Additionally, the tube **700** may have a circular profile, but the profile of the tube **700** may also be in other shapes such as an ellipse or a rectangle. One example of such a system

is disclosed in commonly-assigned U.S. patent application Ser. No. 15/007,783, entitled "Transportation System", the entire contents of which are expressly incorporated by reference herein in their entirety.

[0051] An electromagnetic system powers pods **798** that move through the tube **700**. The electromagnetic system may include magnets **799** provided on each pod **798** serving as rotors. The electromagnetic system also includes aligned stator segments **780** placed in portions of the tube where the pods **798** are to be accelerated. The aligned stator segments **780** may include interlocked blocks of windings as described in commonly-assigned U.S. patent application Ser. No. 15/007,940, filed on Jan. 27, 2016 and entitled "Continuous Winding for Electric Motors", the entire contents of which are expressly incorporated by reference herein in their entirety.

[0052] The electromagnetic system works as a linear motor to generate a force that is proportional to both the current running through the stator segments **780** and the magnetic field of the rotor carried by the pod **798**. The force itself is produced by induction which produces a magnetic field opposite to the magnetic field of the rotor **799**. The opposing fields repel each other, and these forces act to propel the pod **798** and rotor **799** through the tube **700**.

[0053] The tube **700** may be depressurized (vacuumed) in a way that reduces resistance encountered by the pods **798** as they move through the tube **700**. In this way, pods **798** may achieve faster speeds or the same speed with less power, using the electromagnetic system that includes the aligned stator segments **780** and the rotors **799** carried by the pods **798**. That is, pods **798** will require less propulsion force to obtain a given speed using the electromagnetic system that includes the aligned stator segments **780** and the rotors **799** carried by the pods **798**.

[0054] Motor drive systems **728** apply voltage to the stator segments **780**. Each motor drive system **728** provides power to a subset of the stator segments **780**. Each motor drive system **728** is a medium-voltage motor drive such as the medium-voltage motor drive system **128** shown in FIG. 1. Further, each motor drive system **728** can include one or more energy storage modules such as ultracapacitors **231**, flywheels and/or other storage devices, as illustrated and described with reference to FIG. 2. The energy storage module of the motor drive system **728** serves as energy storage in a hybrid energy supply system that collects energy from energy sources/power supplies **725** and provides energy through a low-voltage converter (not shown) when the motor drive system **728** is activated to power stator segments **780**.

[0055] Similarly, motor drive systems **728** may provide power via a circuit such as **500** shown in FIG. 8 or **600** shown in FIG. 9, so that stator segments **780** are selectively driven via line commutated inverters in the circuits. Power may be provided from the motor drive systems **728** as alternating current power, translated into direct current for the circuits **500**, **600**, and then processed by the line commutated inverters so as to drive the stator segments of the linear motor.

[0056] Power supplies **725** are representative of a power grid, and may derive power from, e.g., power stations, solar panels and/or other forms of power that can be placed on the power grid. The motor drive systems **728** are coupled to power supplies **725** to provide power in a synchronized pattern, so that stator segments **780** are powered as a pod **798**



approaches, and depowered as a pod 798 departs. Therefore, stator segments 780 are powered in a synchronized manner that reflects the actual relative location of the pod 798 to each stator segment 780. The actual location of the pod 798 may be determined in a variety of manners including use of fixed sensors in the tube 700 that detect the presence of a pod 798 at a specific location in the tube 798.

[0057] Presence of a pod 798 at a specific location within a tube 700 can also be projected. For example, knowledge of the location of a pod 798 at a specific location and time can be combined with known acceleration characteristics of the linear motor within the tube 700 to project when the pod 798 will be at a specific location within the tube 700. Moreover, since the acceleration characteristics of the linear motor within the tube 700 are expected to remain the same over time, a plot of the trajectory and timing of a pod 798 in the tube 700 can be generated. Therefore, as long as the starting time for a pod 798 is known, a trajectory from start to finish can be used as a timing plan for the pod 798. In this way, the presence of the pod 798 at different times at hundreds or even thousands of different stator segments 780 within the tube can be projected.

[0058] The relative proximity of a pod 798 to a particular stator segment 780 can also involve a combination of detected locations of the pod and projections based on the detected locations. For example, a sensor may be placed at spaced locations, e.g., every 10 stator segments 780, and the detected presence of the pod 798 at a sensor can then be used to project the presence of the pod 798 at each of the additional stator segments 780. Alternatively, a plan may be provided before a pod 798 ever starts a journey through the tube 700, and the plan may plot the location and time of the pod at every stator segment 780 within a tube 700. When a plan is used, presence and speed of the pod 798 at specific locations within the tube 700 can be compared to the plan in order to account for any discrepancies between the plan and the actual positions of the pod 798 within the tube 100.

[0059] A plan can be generated in several ways. One way to generate a plan is to propel a pod 798 through a tube 700 and plot positions of the pod 798 within the tube at specific times. Another way to generate a plan is to identify acceleration characteristics of the linear motor, such as the force to be generated and the expected mass of a pod 798 to be propelled through the pod. Knowledge of the acceleration characteristics of the linear motor can be used to generate a plan that plots the position of the pod 798 within the tube 700 at different times relative to the absolute starting time of the pod. In this way, the same plan can be used over and over, and a process of synchronizing the power to stator segments can be automatically performed by a computer and a set of variable frequency drivers.

[0060] Tube 700 includes a track support 750 and stators 780. The stators 780 include interconnected blocks of windings, and are linked together by, e.g., joints, in sections of the tube 700 where pods are to be accelerated by the linear motor. The pod 798 is shown as separate from the magnetic element 799 (rotor). However, the magnetic element 799 may be a component of the pod 798. Regardless, the magnetic element 799 moves with the pod 798 through the tube 700, and serves as a rotor 799 of the linear motor described herein. In this way, electromagnetic force can be dynamically generated as the pod 798 moves through the tube 700.

[0061] The features of the present disclosure mainly relate to how energy is stored in and provided by a hybrid energy supply system, and how stator segments 780 can be selectively activated and deactivated. The hybrid energy supply system is an element of a motor drive system 728 in FIGS. 10a and 10b, and can dynamically obtain supplemental power from power supplies 725 on an as-needed or on-demand basis. In this way, when obtained from the grid, a large energy user such as described herein can dynamically obtain the supplemental power at off-peak demand times, for example. The energy can be stored in energy storage modules of the motor drive systems 728, and then dynamically provided via circuits 500, 600 to power stator segments 520, 620.

[0062] Power is supplied to the stator segments 780 in order to generate voltage that works together with the magnetic elements (or rotor) 799 to produce an electromagnetic force that propels the pods 798 through the tube 700. In this way, the magnetic elements (or rotor) 799 and stator segments 780 form a linear motor.

[0063] In accordance with embodiments, Medium-voltage (MV) is defined by the Institution of Electrical and Electronic Engineers (IEEE) as 1 kV to 100 kV. In an embodiment of the present disclosure, voltages up to 8410 volts are applied to the core of the stator of the linear motor.

[0064] FIG. 11 is a view of another transportation system that includes a motor drive system for a linear motor, according to an aspect of the present disclosure. In the embodiment of FIG. 8, stator segments 880 are shown placed at some portions of the tube 800 but not at others. In FIG. 8, stator segments 880 are selectively placed where pods are to be accelerated or decelerated, but need not be placed at numerous other locations along the tube 800. A concentration of stator segments 880, e.g., as shown at the leftmost portion of the tube 800, may be a location at which a pod is to be accelerated from 0 to a maximum intended speed. Individual stator segments 880 may also be placed and/or grouped together along tube 800 to boost or reaccelerate the pods to compensate for any deceleration due to air flows in the tube 800 or friction caused by contact with track supports or other elements in the tube 800. Of course, stator segments 880 may be used also to decelerate a pod 798, and may even be placed along the tube 800 specifically for the purpose of deceleration in locations where acceleration will not normally be provided.

[0065] In FIG. 11, the motor drive system 828 uses power from power supplies 825 to selectively power stator segments 880 as a pod 798 approaches. The motor drive systems 828 include the hybrid energy supply systems described herein to store and provide the power when needed. Power stored in low-power energy storage modules such as ultracapacitors, flywheel and/or other suitable devices can be converted by a low-voltage converter module to medium-voltage so as to power the stator segments 880. Additionally, as shown in FIG. 11, the motor drive systems 828 and any local power supplies 825 are positioned only where stator segments 880 are placed in the tube 800. As such, motor drive systems 828 and power supplies 825 are not necessarily placed along areas of the tube 800 where stator segments 880 are not required and acceleration or deceleration of pods is not anticipated.

[0066] FIG. 12 is a flow chart for processes performed while charging and discharging energy to and from a hybrid energy supply system, according to an aspect of the present

disclosure. At **5901**, an instruction is received to either drive (or brake) a pod via a stator segment, or to charge (or discharge) a low power storage module such as an ultracapacitor, flywheel, etc. If the instruction is to drive a pod, an external energy source **125** is disconnected at **5920** from the energy storage module of the motor drive via switching elements such as first switching elements **122** shown in FIG. 1. One or more linear motor segments are connected, e.g., sequentially, at **S925** via switches such as second switching elements **127** shown in FIG. 1. At **S930**, power is provided from motor drive with energy storage **130** to the connected linear motor segments **120** through a converter module **233**, **233'**, **233''**, **233'''**. At **S965**, the process is complete.

[**0067**] If an instruction is received to brake the pod, an external energy source **125** is disconnected at **S9350** from the energy storage module of the motor drive via switching elements such as first switching elements **122** shown in FIG. 1. One or more linear motor segments are connected, e.g., sequentially, at **S940** via switches such as second switching elements **127** shown in FIG. 1. At **S945**, energy storage module **230** (ES1, ES2) absorbs energy from the linear motor segments **120**. At **S965**, the process is complete.

[**0068**] If the instruction is to charge the of the energy storage module **230** (ES1, ES2), a linear motor segment **120** is disconnected at **S905** via switching elements such as second switching elements **127** shown in FIG. 1. An external energy source **125** is connected at **S910** to energy storage module **230** (ES1, ES2) via switches such as first switching elements **122** in FIG. 1. At **S915**, power is provided to charge energy storage module **230** (ES1, ES2). At **S965**, the process is again complete.

[**0069**] If an instruction is received to discharge the energy storage module **230** (ES1, ES2), a linear motor segment **120** is disconnected at **S950** via switching elements such as second switching elements **127** shown in FIG. 1. An external energy source **125** is connected at **S955** to energy storage module **230** (ES1, ES2) via switches such as first switching elements **122** in FIG. 1. At **S960**, energy storage module **230** (ES1, ES2) is discharged to generate power that is supplied to external energy source **125**. At **S965**, the process is again complete.

[**0070**] As described with respect to FIG. 12, a hybrid energy supply system can be used to obtain and store power from power sources, and then provide the power on-demand to dynamically power stator segments of a linear motor in a transportation system. The synchronization shown in FIG. 12 can be implemented using a computer and communications network to control switches (switching elements), line commutated inverters, and motor drive systems. A computer may be used to receive information of a pod location, and then dynamically coordinate stator elements to activate as the pod approaches. Similarly, the computer may receive information regarding energy levels in low power energy modules, and determine when power should be obtained from energy sources for storage at the low power energy modules. Of course, multiple computers can be used to dynamically coordinate stator segment control and energy storage in a transportation system, and processes such as those described herein may be distributed among computers separately assigned to different individual computers.

[**0071**] As described, stator segments are individually powered in accordance with a preplanned routing, or dynamic instructions based on specifically confirmed locations of a pod moving through a tube. The stator segments

can be powered using energy stored in the hybrid energy supply system described herein, and in accordance with individually controlled line commutated inverters as described herein. Power is selectively provided to stator segments in locations where the pod is to be accelerated or braked, and the power to different stator segments may be provided by different motor drive systems as described herein.

[**0072**] Additionally, as explained with respect to FIG. 11, stator segments **880** can be selectively turned on and off as a pod **798** approaches and departs. Adjacent stator segments **880** can be turned on at the same time that previous stator segments **880** are turned off, or the time in which stator segments **880** are powered may overlap either partially or fully. The powering of stator segments **880** can be synchronized so that even if several stator segments **880** are powered at the same time, a new stator segment **880** ahead of the pod **798** is provided power as power is shut off to the last powered stator segment **880** behind the pod.

[**0073**] Additionally, information may be passed between multiple motor drive systems to coordinate driving of stator segments. For example, a computer can coordinate and synchronize frequency and phase passing between motor drive systems for a tube that stretches hundreds of kilometers.

[**0074**] Positions and velocities of the pods can be identified by sensors such as velocity sensors placed at fixed locations within a tube. The position and velocity information can be used to help motor drive systems selectively power specific stator segments assigned to the motor drive systems. For example, a coordinating computer may coordinate and synchronizes power control by multiple different motor drive system.

[**0075**] FIG. 13 is an illustrative embodiment of a computer system, on which the disclosed methods relating to a hybrid energy supply system can be implemented, and which is shown and is designated **1000**. The computer system **1000** can include a set of instructions that can be executed to cause the computer system **1000** to perform any one or more of the methods or computer based functions disclosed herein. The computer system **1000** may operate as a standalone device or may be connected, for example, using a network **1001**, to other computer systems or peripheral devices.

[**0076**] In a networked deployment, the computer system **1000** may operate in the capacity of a server or as a client user computer in a server-client user network environment, or as a peer computer system in a peer-to-peer (or distributed) network environment. The computer system **1000** can also be implemented as or incorporated into various devices, such as a stationary computer, a mobile computer, a personal computer (PC), a laptop computer, a tablet computer, a wireless smart phone, a set-top box (STB), a personal digital assistant (PDA), a global positioning satellite (GPS) device, a communications device, a portable telephone, a control system, a camera, a sensor, a coordinating computer, a variable frequency drive, or any other machine capable of executing a set of instructions (sequential or otherwise) that specify actions to be taken by that machine. The computer system **1000** can be incorporated as or in a particular device that in turn is in an integrated system that includes additional devices. In a particular embodiment, the computer system **1000** can be implemented using electronic devices that provide voice, video or data communication. Further, while

a single computer system **1000** is illustrated, the term “system” shall also be taken to include any collection of systems or sub-systems that individually or jointly execute a set, or multiple sets, of instructions to perform one or more computer functions.

[0077] As illustrated in FIG. 13, the computer system **1000** includes a processor **1010**. A processor for a computer system **1000** is tangible and non-transitory. As used herein, the term “non-transitory” is to be interpreted not as an eternal characteristic of a state, but as a characteristic of a state that will last for a period of time. The term “non-transitory” specifically disavows fleeting characteristics such as characteristics of a particular carrier wave or signal or other forms that exist only transitorily in any place at any time. A processor is an article of manufacture and/or a machine component. A processor for a computer system **1000** is configured to execute software instructions in order to perform functions as described in the various embodiments herein. A processor for a computer system **1000** may be a general purpose processor or may be part of an application specific integrated circuit (ASIC). A processor for a computer system **1000** may also be a microprocessor, a microcomputer, a processor chip, a controller, a microcontroller, a digital signal processor (DSP), a state machine, or a programmable logic device. A processor for a computer system **1000** may also be a logical circuit, including a programmable gate array (PGA) such as a field programmable gate array (FPGA), or another type of circuit that includes discrete gate and/or transistor logic. A processor for a computer system **1000** may be a central processing unit (CPU), a graphics processing unit (GPU), or both. Additionally, any processor described herein may include multiple processors, parallel processors, or both. Multiple processors may be included in, or coupled to, a single device or multiple devices.

[0078] Moreover, the computer system **1000** includes a main memory **1020** and a static memory **1030** that can communicate with each other via a bus **1008**. Memories described herein are tangible storage mediums that can store data and executable instructions, and are non-transitory during the time instructions are stored therein. As used herein, the term “non-transitory” is to be interpreted not as an eternal characteristic of a state, but as a characteristic of a state that will last for a period of time. The term “non-transitory” specifically disavows fleeting characteristics such as characteristics of a particular carrier wave or signal or other forms that exist only transitorily in any place at any time. A memory described herein is an article of manufacture and/or machine component. Memories described herein are computer-readable mediums from which data and executable instructions can be read by a computer. Memories as described herein may be random access memory (RAM), read only memory (ROM), flash memory, electrically programmable read only memory (EPROM), electrically erasable programmable read-only memory (EEPROM), registers, a hard disk, a removable disk, tape, compact disk read only memory (CD-ROM), digital versatile disk (DVD), floppy disk, Blu-ray disk, or any other form of storage medium known in the art. Memories may be volatile or non-volatile, secure and/or encrypted, unsecure and/or unencrypted.

[0079] As shown, the computer system **1000** may further include a video display unit **1050**, such as a liquid crystal display (LCD), an organic light emitting diode (OLED), a

flat panel display, a solid state display, or a cathode ray tube (CRT). Additionally, the computer system **1000** may include an input device **1060**, such as a keyboard/virtual keyboard or touch-sensitive input screen or speech input with speech recognition, and a cursor control device **1070**, such as a mouse or touch-sensitive input screen or pad. The computer system **1000** can also include a disk drive unit **1080**, a signal generation device **1090**, such as a speaker or remote control, and a network interface device **1040**.

[0080] In a particular embodiment, as depicted in FIG. 13, the disk drive unit **1080** may include a computer-readable medium **1082** in which one or more sets of instructions **1084**, e.g. software, can be embedded. Sets of instructions **1084** can be read from the computer-readable medium **1082**. Further, the instructions **1084**, when executed by a processor, can be used to perform one or more of the methods and processes as described herein. In a particular embodiment, the instructions **1084** may reside completely, or at least partially, within the main memory **1020**, the static memory **1030**, and/or within the processor **1010** during execution by the computer system **1000**.

[0081] In an alternative embodiment, dedicated hardware implementations, such as application-specific integrated circuits (ASICs), programmable logic arrays and other hardware components, can be constructed to implement one or more of the methods described herein. One or more embodiments described herein may implement functions using two or more specific interconnected hardware modules or devices with related control and data signals that can be communicated between and through the modules. Accordingly, the present disclosure encompasses software, firmware, and hardware implementations. Nothing in the present application should be interpreted as being implemented or implementable solely with software and not hardware such as a tangible non-transitory processor and/or memory.

[0082] In accordance with various embodiments of the present disclosure, the methods described herein may be implemented using a hardware computer system that executes software programs. Further, in an exemplary, non-limited embodiment, implementations can include distributed processing, component/object distributed processing, and parallel processing. Virtual computer system processing can be constructed to implement one or more of the methods or functionality as described herein, and a processor described herein may be used to support a virtual processing environment.

[0083] The present disclosure contemplates a computer-readable medium **1082** that includes instructions **1084** or receives and executes instructions **1084** responsive to a propagated signal; so that a device connected to a network **1001** can communicate voice, video or data over the network **1001**. Further, the instructions **1084** may be transmitted or received over the network **1001** via the network interface device **1040**.

[0084] A coordinating computer as described herein may include the features shown in FIG. 13. Such a coordinating computer can coordinate when to dynamically activate line commutated inverters to drive active stator segments such as in FIGS. 8 and 9. Such a coordinating computer can also coordinate when to provide power from external energy supplies to low power energy storage modules such as ultracapacitors, flywheels, etc., or when to provide power from low power energy storage modules to use in powering stator segments. That is, at times certain stator segments in

the proximity of a pod are selectively switched ON, and the remaining stator segments are switched OFF. In this way, both energy stored by energy storage modules and energy provided from energy storage modules to a circuit for a motor drive system **500, 600** is controlled using a computer such as computer **1000** shown in FIG. **13**.

**[0085]** Although a hybrid energy supply system has been described with reference to several exemplary embodiments, it is understood that the words that have been used are words of description and illustration, rather than words of limitation. Changes may be made within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of a hybrid energy supply system in its aspects. Although a hybrid energy supply system has been described with reference to particular means, materials and embodiments, a hybrid energy supply system is not intended to be limited to the particulars disclosed; rather a hybrid energy supply system extends to all functionally equivalent structures, methods, and uses such as are within the scope of the appended claims.

**[0086]** Although the present specification describes components and functions that may be implemented in particular embodiments, the disclosure is not limited to such components, functions and embodiments.

**[0087]** The illustrations of the embodiments described herein are intended to provide a general understanding of the structure of the various embodiments. The illustrations are not intended to serve as a complete description of all of the elements and features of the disclosure described herein. Many other embodiments may be apparent to those of skill in the art upon reviewing the disclosure. Other embodiments may be utilized and derived from the disclosure, such that structural and logical substitutions and changes may be made without departing from the scope of the disclosure. Additionally, the illustrations are merely representational and may not be drawn to scale. Certain proportions within the illustrations may be exaggerated, while other proportions may be minimized. Accordingly, the disclosure and the figures are to be regarded as illustrative rather than restrictive.

**[0088]** One or more embodiments of the disclosure may be referred to herein, individually and/or collectively, by the term "invention" merely for convenience and without intending to voluntarily limit the scope of this application to any particular invention or inventive concept. Moreover, although specific embodiments have been illustrated and described herein, it should be appreciated that any subsequent arrangement designed to achieve the same or similar purpose may be substituted for the specific embodiments shown. This disclosure is intended to cover any and all subsequent adaptations or variations of various embodiments. Combinations of the above embodiments, and other embodiments not specifically described herein, will be apparent to those of skill in the art upon reviewing the description.

**[0089]** According to an aspect of the present disclosure, a motor drive system for a linear motor includes multiple low-voltage modules that each store energy. The motor drive system also includes multiple first switching elements operable to connect the low-voltage modules to an energy source to charge the low-voltage modules, and multiple second switching elements operable to connect the motor drive system to the linear motor to power the linear motor.

**[0090]** According to another aspect of the present disclosure, the motor drive system includes at least one low-voltage power converter that converts power from the low-voltage modules of the motor drive system to supply to the linear motor via the second switching elements.

**[0091]** According to still another aspect of the present disclosure, each of the low-voltage energy storage modules comprises an ultracapacitor.

**[0092]** According to yet another aspect of the present disclosure, the low-voltage modules are connected in a Wye configuration.

**[0093]** According to another aspect of the present disclosure, the low-voltage modules are connected in a Delta configuration.

**[0094]** According to still another aspect of the present disclosure, at least two of the plurality of low-voltage modules are connected in series and comprise a medium-voltage motor drive, and receive power from an energy source via a common first switching element.

**[0095]** According to yet another aspect of the present disclosure, at least two of the multiple low-voltage modules are connected in series and comprise a medium-voltage motor drive, and provide power to the linear motor via a common switching element.

**[0096]** According to another aspect of the present disclosure, the second switching elements are operable to connect to different segments of the linear motor to selectively power the different segments of the linear motor.

**[0097]** According to still another aspect of the present disclosure, the different segments of the linear motor comprise fixed stator segments of the linear motor. Each of the different segments of the linear motor is selectively powered as a moving rotor of the linear motor approaches, and is selectively unpowered as the moving rotor of the linear motor departs.

**[0098]** According to yet another aspect of the present disclosure, each stator segment of the linear motor includes multiple coils molded together in a block.

**[0099]** According to another aspect of the present disclosure, the low-voltage module and the low-voltage power converter are provided together.

**[0100]** According to still another aspect of the present disclosure, the energy source provides a lower voltage to the motor drive system than the motor drive system provides to the linear motor.

**[0101]** According to yet another aspect of the present disclosure, the ultracapacitor is embedded in the low-voltage module.

**[0102]** According to another aspect of the present disclosure, the low-voltage modules and low-voltage power converter comprise a motor drive.

**[0103]** According to still another aspect of the present disclosure, the motor drive comprises a variable frequency drive used to drive the linear motor.

**[0104]** According to yet another aspect of the present disclosure, the motor drive is coordinated to drive a segment of the linear motor when a rotor approaches the segment of the linear motor.

**[0105]** According to another aspect of the present disclosure, the linear motor is aligned in a tube through which a pod is driven electromagnetically, and the moving rotor is carried by the pod.

**[0106]** According to still another aspect of the present disclosure, the interior of the tube is substantially vacuumed,

and the pod is guided through the tube using at least one rail that extends through the tube.

[0107] According to yet another aspect of the present disclosure, the moving rotor comprises a magnet.

[0108] According to another aspect of the present disclosure, power from the power source is dynamically controlled based on positions of the pod as the pod moves through the fixed tube, so that the motor drive system drives the linear motor via the second switching elements as the pod approaches and so that the motor drive system stops driving the linear motor via the second switching elements as the pod moves away.

[0109] According to an aspect of the present disclosure, a linear motor system includes multiple line commutated inverters distributed along a linear motor and each having an alternating current side that outputs alternating current, and a direct current side that conveys direct current. The alternating current side of each line commutated inverter is connected to a stator segment of the linear motor, and the direct current sides of each line commutated inverter are connected in series.

[0110] According to another aspect of the present disclosure, the direct current sides of the line commutated inverters are connected in series to line commutated inverters that connect to an energy storage and to an energy source.

[0111] According to still another aspect of the present disclosure, the energy storage comprises an ultracapacitor.

[0112] According to still another aspect of the present disclosure, a direct current in a direct current loop smoothing inductor is built up by converting energy either from the energy source or from the energy storage via the respective line commutated inverter connected to the energy source or the energy storage.

[0113] According to another aspect of the present disclosure, the built up direct current is used to charge or discharge the energy storage via the line commutated inverter connected to the energy storage.

[0114] According to still another aspect of the present disclosure, as a rotor travels along the linear motor, the line commutated inverters connected to stator segments of the linear motor commutate the direct current sequentially into each phase of stator coils in the stator segments in order to form a moving flux that drives the rotor.

[0115] According to yet another aspect of the present disclosure, the line commutated inverters connected to stator segments which are not currently powered bypass the direct current by turning on a plurality of thyristors in one or more phases.

[0116] According to another aspect of the present disclosure, a direct current inductor is implemented using passive stator coils that are not currently powered, and selected thyristors are activated such that passive stator coils are connected in the direct current loop to provide direct current inductance.

[0117] According to still another aspect of the present disclosure, the distributed line commutated inverters are connected to the linear motor to reduce torque ripples. Each of the distributed line commutated inverters have multiple phase legs, and adjacent line commutated inverters operate with phase shifts.

[0118] The Abstract of the Disclosure is provided to comply with 37 C.F.R. §1.72(b) and is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing

Detailed Description, various features may be grouped together or described in a single embodiment for the purpose of streamlining the disclosure. This disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter may be directed to less than all of the features of any of the disclosed embodiments. Thus, the following claims are incorporated into the Detailed Description, with each claim standing on its own as defining separately claimed subject matter.

[0119] The preceding description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the present disclosure. As such, the above disclosed subject matter is to be considered illustrative, and not restrictive, and the appended claims are intended to cover all such modifications, enhancements, and other embodiments which fall within the true spirit and scope of the present disclosure. Thus, to the maximum extent allowed by law, the scope of the present disclosure is to be determined by the broadest permissible interpretation of the following claims and their equivalents, and shall not be restricted or limited by the foregoing detailed description.

What is claimed is:

1. A motor drive system for a linear motor, comprising:
  - a plurality of low-voltage modules that each store energy; and
  - a plurality of second switching elements operable to connect the motor drive system to the linear motor to power the linear motor.
2. The motor drive system of claim 1, further comprising:
  - a plurality of first switching elements operable to connect the low-voltage modules to an energy source to charge the low-voltage modules.
3. The motor drive system of claim 1, further comprising:
  - at least one low-voltage power converter configured to convert power from the low-voltage modules of the motor drive system and to supply power to the linear motor via the plurality of second switching elements.
4. The motor drive system of claim 1,
  - wherein each of the low-voltage modules comprises an ultracapacitor.
5. The motor drive system of claim 1,
  - wherein each of the low-voltage modules comprises a flywheel.
6. The motor drive system of claim 1,
  - wherein the low-voltage modules are connected in a Wye configuration.
7. The motor drive system of claim 1,
  - wherein the low-voltage modules are connected in a Delta configuration.
8. The motor drive system of claim 1,
  - wherein at least two of the plurality of low-voltage modules are connected in series and comprise a medium-voltage motor drive, and receive power from an energy source via a common first switching element.
9. The motor drive system of claim 1,
  - wherein at least two of the plurality of low-voltage modules are connected in series and comprise medium-voltage motor drive, and provide power to the linear motor via a common second switching element.

10. The motor drive system of claim 1, wherein the plurality of second switching elements are operable to connect to different segments of the linear motor to selectively power the different segments of the linear motor.

11. The motor drive system of claim 9, wherein the different segments of the linear motor comprise fixed stator segments of the linear motor; and wherein each of the different segments of the linear motor is selectively powered as a moving rotor of the linear motor approaches, and is selectively unpowered as the moving rotor of the linear motor departs.

12. The motor drive system of claim 10, wherein each stator segment of the linear motor comprises a plurality of coils molded together in a block.

13. The motor drive system of claim 2, wherein the low-voltage module and the low-voltage power converter are provided together.

14. The motor drive system of claim 1, wherein the energy source provides a lower voltage to the motor drive system than the motor drive system provides to the linear motor.

15. The motor drive system of claim 3, wherein the low-voltage modules and low-voltage power converter comprise a motor drive.

16. The motor drive system of claim 15, wherein the motor drive comprises a variable frequency drive used to drive the linear motor.

17. The motor drive system of claim 15, wherein the motor drive is configured to drive a segment of the linear motor when a rotor approaches the segment of the linear motor.

18. The motor drive system of claim 11, wherein the linear motor is aligned in a tube through which a pod is driven electromagnetically, and wherein the moving rotor is carried by the pod.

19. The motor drive system of claim 18, wherein the interior of the tube is substantially vacuumed, and wherein the pod is guided through the tube using at least one rail that extends through the tube.

20. The motor drive system of claim 11, wherein the moving rotor comprises a magnet.

21. The motor drive system of claim 18, wherein power from the power source is dynamically controlled based on positions of the pod as the pod moves through the fixed tube, so that the motor drive system drives the linear motor via the second switching elements as the pod approaches and so that the motor drive system stops driving the linear motor via the second switching elements as the pod moves away.

22. A linear motor system, comprising:  
a plurality of line commutated inverters distributed along a linear motor and each having an alternating current side that outputs alternating current, and a direct current side that conveys direct current,  
wherein the alternating current side of each line commutated inverter is connected to a stator segment of the linear motor, and  
wherein the direct current sides of each line commutated inverter are connected in series.

23. The linear motor system of claim 22, wherein the direct current sides of the line commutated inverters are connected in series to line commutated inverters that connect to an energy storage and to an energy source.

24. The linear motor system of claim 23, wherein the energy storage comprises an ultracapacitor.

25. The linear motor system of claim 23, wherein a direct current in a direct current loop smoothing inductor is built up by converting energy either from the energy source or from the energy storage via a respective line commutated inverter connected to the energy source or the energy storage.

26. The linear motor system of claim 25, wherein the built up direct current is used to charge or discharge the energy storage via the line commutated inverter connected to the energy storage.

27. The linear motor system of claim 26, wherein, as a rotor travels along the linear motor, the line commutated inverters connected to stator segments of the linear motor commute the direct current sequentially into each phase of stator coils in the stator segments in order to form a moving flux that drives the rotor.

28. The linear motor system of claim 27, wherein the line commutated inverters connected to stator segments which are not currently powered bypass the direct current by turning on a plurality of thyristors in one or more phases.

29. The linear motor system of claim 28, wherein a direct current inductor is implemented using passive stator coils that are not currently powered, and selected thyristors are activated such that passive stator coils are connected in the direct current loop to provide direct current inductance.

30. The linear motor system of claim 22, wherein the distributed line commutated inverters are connected to the linear motor to reduce torque ripples, wherein each of the distributed line commutated inverters have multiple phase legs, and wherein adjacent line commutated inverters operate with phase shifts.

\* \* \* \* \*